# TECHNICAL DATA SHEET

# MED 5590U Single-Coated Film

MED 5590U is a single-coated, soft, pliable, transparent polyurethane film with a solventless acrylic adhesive. This product's thin and conformable film offers a high degree of user comfort, while its transparency allows for wound or site visibility; in some applications, it can act as a barrier to assist in decreasing the risk of bacterial infections.

#### **TYPICAL APPLICATION**

Designed for incise applications, wound care, IV securement and situations requiring very high MVTR and sustained periods of wear.

#### FEATURES AND BENEFITS


- Thin and conformable
- Transparent
- Highly breathable
- Die-cuttable
- Extended wear time
- Printable
- Moisture resistant
- Gamma and EtO sterilizable
- Available with and without handling bars

Product Construction						
	TYPICAL VALUES*		DESCRIPTION			
SUPPORT THICKNESS	0.8 mils	20 µm	Transparent polyethylene film			
CARRIER THICKNESS	1 mils	25 µm	Transparent polyethylene film			
ADHESIVE THICKNESS	1.2 mils	30 µm	Solventless acrylic adhesive designed for medical applications			
RELEASE LINER THICKNESS	2.6 mils	65 µm	White super-calendered glassine			

\*Refer to product specifications for material acceptance limits.



## MED 5590U

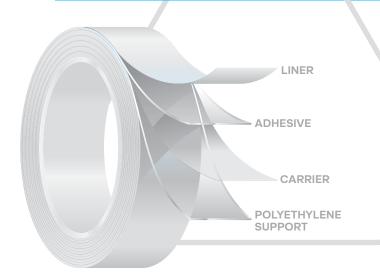

## TECHNICAL DATA SHEET

### MED 5590U Single-Coated Film

Physical Properties [Not intended as specification]					
	TEST METHOD*	TYPICAL VALUES <sup>†</sup>			
PEEL ADHESION ON POLYETHYLENE	TDS-01	0.7 lbf/in	3 N/25 mm		
PEEL ADHESION ON STAINLESS STEEL	TDS-03	1 lbf/in	4.5 N/25 mm		
LINER RELEASE	TDS-06	3 oz/in	48 g/25 mm		
FINAT TACK	TDS-07	5 lbf/in	20 N/25 mm		
DYNAMIC SHEAR	TDS-10	33 lbf/in	140 N/25 mm		
MVTR	TDS-16	100 g/100 in <sup>2</sup> per 24 hr	1500 g/m² per 24 hr		
ELONGATION					
MACHINE DIRECTION	TDS-15	600%			
CROSS DIRECTION	TDS-15	575%			
LOAD AT BREAK					
MACHINE DIRECTION	TDS-15	2.5 lbf/in	10 N/25 mm		
CROSS DIRECTION	TDS-15	2 lbf/in	10 N/25 mm		

MVTR, moisture vapor transmission rate.

\*Test method information available upon request.

\*Refer to product specifications for material acceptance limits.

STORAGE AND SHELF LIFE: Two years when stored at 23°C (73°F), 50% relative humidity, out of direct sunlight, in original packaging.

DEFINITIONS: "Avery Dennison Medical" means Avery Dennison Corporation. "Purchaser", "Customer" and/or "User" means the customer of Seller, jointly referred to as "Parties" or individually as "Party". For the purpose of these Conditions, "Products" means goods, all parts, components and services sold by Avery Dennison Medical to Purchaser.

**SAFETY:** Customers/Users have full responsibility to determine the suitability of Avery Dennison Medical products for applications in their businesses. This includes both safety and biocompatibility assessments. Material Safety Data Sheets (MSDS) will be provided upon request, as well as summaries of components' biocompatibility testing results (ISO 10993), where available. Customers should perform their own assessments on final products in compliance with applicable regulatory requirements.

LIMITED WARRANTY: All statements, technical information and recommendations concerning Products sold or samples provided by Avery Dennison Medical are based upon tests believed to be reliable but do not constitute a guarantee or warranty, and the Purchaser is responsible for determining whether a Product is fit for a particular purpose and for the Product's application. All Products are sold and samples of products are provided with the understanding that the Purchaser has independently determined the suitability of such products for its purposes. Avery Dennison Medical warrants the Products to be free from defects in material and workmanship by the time of the delivery (in other words: the initial date of the shipment). Should any failure to conform to this warranty appear (i) during the time period stated on the specific product specification sheet, or (ii) during the time period on the specific product information literature in effect at time of shipment, or (iii) if not otherwise specified then within one year after the initial date of shipment, then Avery Dennison Medical shall, upon notification thereof and substantiation that the Products have been stored and applied in accordance with the standards set by Avery Dennison Medical plant or at the location of the Products. Such price of repair or replacement shall not exceed the purchase price of the Products upon which the liability is based, and Avery Dennison Medical may in its sole discretion refund the purchase price of the Products avery Dennison Medical may in its sole discretion refund the ory Saliable on thus://medical.averydennison.com/en/home/terms-and-conditions.html, which may be updated from time to time by Avery Dennison and of which a copy is also available on request. This warranty is exclusive and is in lieu of any implied warranty of merchantability and any implied warranty of fitness for a particular purpose or other warranty of quality, whether express or implied, except the warranty of title and against patent infringement. No waiver,

LIMITATION OF LIABILITY: In no event shall Avery Dennison Medical be liable for any incidental or consequential damages, including but not limited to, loss of profit, loss of use of production or loss of capital. The remedies of the Purchaser set forth herein are exclusive and the total liability of Avery Dennison Medical with respect to any contract, or anything done in connection therewith such as the performance or breach hereof, or from the manufacture, sale, delivery, resale, installation or use of products whether arising out of contract, negligence, strict liability, tort or any other legal theory or under any warranty, or otherwise, shall not exceed the purchase price of the products upon which the liability is based.

#### To learn more about how our material and adhesive science expertise can help drive your next innovation, call us

US: +1 440 534 2600 Belgium: +32 14 40 48 11 Ireland: +353 43 3349586

www.medical.averydennison.com

©2020, Avery Dennison Corporation. Avery Dennison and the triangle logo are registered trademarks of Avery Dennison Corporation. All rights reserved. MTR-MKT-000027-D



MED 5590U