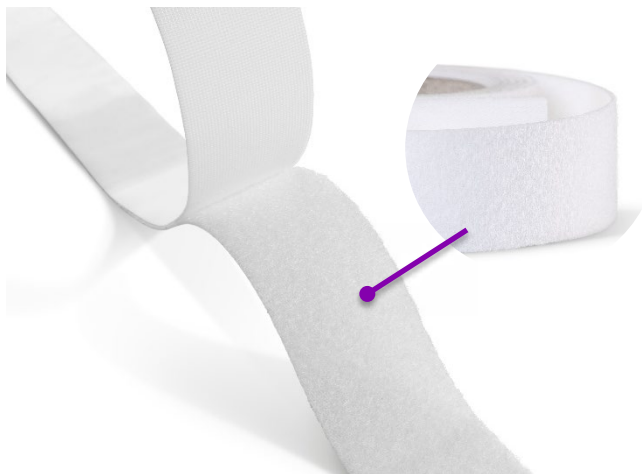


# aplix® 110

## Light weight brushed loop



## Description




- Brushed knitted loop with extra wide coating
- Material : 100 % polyamide
- Methods of attachment : sewing or bonding
- Widths : from 16 to 1400 mm
- Standard colours: white and black, customized colour on request

## Key Benefits

- Very thin contact closure in combination with aplix® 745 Hook
- Excellent shear strength
- Large possibilities of shapes and designs
- Complies with Oeko-Tex® Standard Class 1



## Performances

		Tested with aplix® 745
		New state
	<b>Peel Strength</b> (N/cm) as defined by EN 12 242	<b>0.5</b>
	<b>Shear Strength</b> (N/cm²) as defined by EN 13 780	<b>35</b>
	<b>Traction Strength</b> (N/cm²) as defined by NF G91-103	<b>3</b>

NB : The results shown above are average values obtained from 25 mm wide tapes.

## Packaging

- Roll length : from 50 lm to 200 lm
- Core diameter : 45 mm or 76.2 mm
- Roll diameter : up to 400 mm

## Shelf life and disposal information

- Stored in original packaging, away from sunlight, humidity and extreme temperatures
- Shelf life for adhesive products : 12 months
- Non recyclable product
- Disposal recommendations : the product must be entrusted to a waste processing company

The information contained in this document is for reference purposes only.  
To obtain data suitable for use in technical specification, please contact your APLIX sales representative.